




Tel: 0114 263 4422

Fax: 0114 263 4433

Email: info@shop4fasteners.co.uk

Web: <http://www.shop4fasteners.co.uk>

Drop-In Wedge Anchors

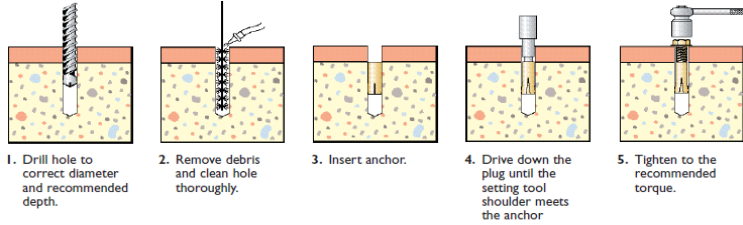

Available in Mild steel zinc plated & stainless steel A4-316

Size	Anchor Hole Dia. (mm)	Thread Dia. (mm)	Shield Length (mm)	Fixture Hole Dia. (mm)	Min Hole Depth (mm)	Internal Thread Length mm	Min Substrate Thickness	Rec Tight Torque (Nm)	Safe Working Load in 30N/mm ² Concrete Tension/Shear
6 x 25	8	M6	25	7-8	25	11	60	4	2.5 / 2.0
8 x 30	10	M8	30	9-10	30	13	70	9	3.4 / 2.4
10 x 50	12	M10	50	11-12	40	16	80	17	5.2 / 2.9
12 x 50	15	M12	50	13-14	50	18	100	30	7.7 / 5.6
16 x 65	20	M16	65	17-18	65	22	130	75	10.3 / 8.8
20 x 80	25	M20	80	21-22	80	30	160	144	14.4 / 10.8