




Tel: 0114 263 4422

Fax: 0114 263 4433

Email: info@shop4fasteners.co.uk

Web: <http://www.shop4fasteners.co.uk>

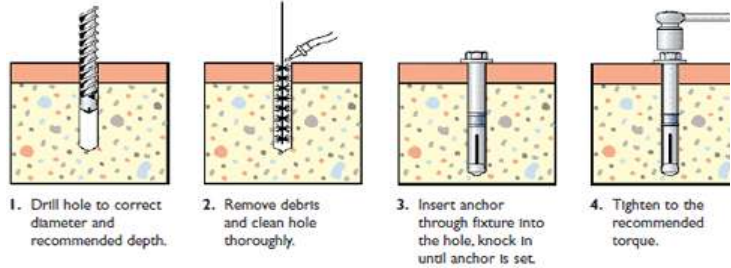

Heavy Duty Anchors Loosebolt Type A

Available in Mild steel zinc plated

Size	Anchor Hole Dia. (mm)	Bolt Size (mm)	Hole Dia. In Fixture (mm)	Hole Dia. In Substrate (mm)	Min Hole Depth (mm)	Max Fixture Thickness mm	Min Substrate Thickness	Rec Tight Torque (Nm)	Safe Working Load in 30N/mm ² Concrete Tension/Shear
6 x 10	10	M6 x 65	12	10	65	10	100	15	4.9 / 5.3
6 x 30	10	M6 x 80	12	10	65	30	100	15	4.9 / 5.3
6 x 50	10	M6 x 110	12	10	65	50	100	15	4.9 / 5.3
8 x 10	12	M8 x 80	14	12	80	10	120	30	8.2 / 9.5
8 x 30	12	M8 x 95	14	12	80	30	120	30	8.2 / 9.5
8 x 50	12	M8 x 120	14	12	80	50	120	30	8.2 / 9.5
10 x 10	15	M10 x 90	16	15	95	10	140	50	10.6 / 12.6
10 x 25	15	M10 x 110	16	15	95	25	140	50	10.6 / 12.6
10 x 40	15	M10 x 130	16	15	95	45	140	50	10.6 / 12.6
12 x 10	18	M12 x 100	20	18	105	10	160	80	15.9 / 21.6
12 x 20	18	M12 x 120	20	18	105	20	160	80	15.9 / 21.6
12 x 40	18	M12 x 140	20	18	105	40	160	80	15.9 / 21.6
16 x 10	24	M16 x 120	26	24	130	10	200	160	23.5 / 34.5
16 x 20	24	M16 x 140	26	24	130	20	200	160	23.5 / 34.5
16 x 50	24	M16 x 160	26	24	130	50	200	160	23.5 / 34.5
20 x 10	28	M20 x 150	30	28	160	10	250	200	35.6 / 51.6
20 x 30	28	M20 x 170	30	28	160	30	250	200	35.6 / 51.6
20 x 60	28	M20 x 190	30	28	160	60	250	200	35.6 / 51.6