




Tel: 0114 263 4422
Fax: 0114 263 4433
Email: info@shop4fasteners.co.uk
Web: http://www.shop4fasteners.co.uk

Sleeve Anchors Countersunk Head

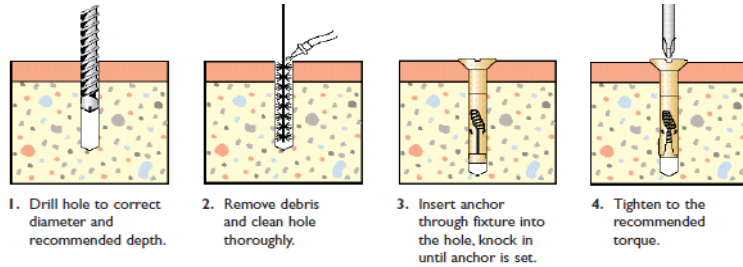

Available steel zinc plated.

Size	Anchor Hole Dia. (mm)	Bolt Size (mm)	Hole Dia. In Fixture (mm)	Hole Dia. In Substrate (mm)	Min Hole Depth (mm)	Max Fixture Thickness mm	Min Substrate Thickness	Rec Tight Torque (Nm)	Safe Working Load in 30N/mm ² Concrete Tension/Shear
6 x 34	6	M4.5 x 34	7-8	6	40	17	60	2.5	1.4 / 1.6
6 x 60	6	M4.5 x 60	7-8	6	40	28	60	2.5	1.4 / 1.6
6 x 75	6	M4.5 x 75	7-8	6	40	47	60	2.5	1.4 / 1.6
8 x 60	8	M6 x 60	9-10	8	45	27	90	6	2.1 / 2.3
8 x 85	8	M6 x 85	9-10	8	45	53	90	6	2.1 / 2.3
10 x 75	10	M8 x 75	11-12	10	45	35	100	11	3.2 / 3.2
10 x 100	10	M8 x 100	11-12	10	55	62	100	11	3.2 / 3.2
10 x 125	10	M8 x 125	11-12	10	60	89	100	11	3.2 / 3.2
10 x 150	10	M8 x 150	11-12	10	60	110	100	11	3.2 / 3.2